

The **GREEN4** is a high-frequency, fully automatic charger for use with lead-acid or lithium batteries. The charger is multi-current configurable via front display and delivers over 90% high-energy efficiency. The **GREEN4** is enclosed in a durable steel case and is wall-mountable.


FEATURES & BENEFITS:

- DC output from 17- to 120-amps
- Charge cycle begins as low as 2-volts
- Soft start charging cycle
- Available in 24-80 volts
- Suitable for flooded, AGM, gel traction, or lithium batteries
- Multi-current configurable via front display or USB A/B port
- USB port allows programming and download of Last 300 charge cycles
- 8-foot AC cable / 10-foot DC cable
- Reverse polarity protection
- Wall-mountable



3 YEAR
INDUSTRIAL APPLICATION
WARRANTY



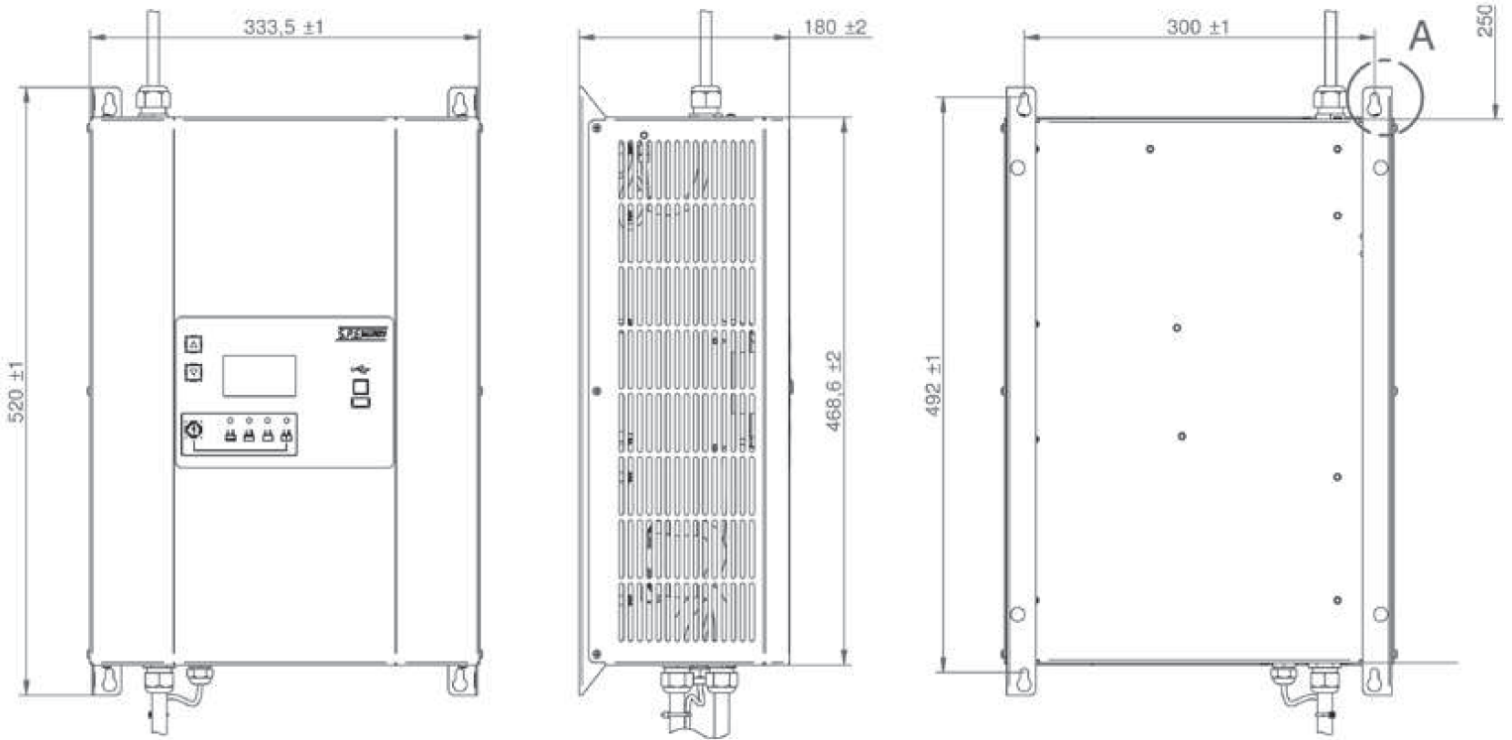

Input Voltage: 208-240VAC

| Model | DC Output Voltage | DC Output Current | Flooded 8-Hour AH Range (C6) | Max AC Input Current | Input Voltage |
|----------------|-------------------|-------------------|------------------------------|----------------------|---|
| GREEN4 | | | | | DIMs: 13.1" x 7.1" x 20.5" Wt.: 29 lbs |
| INT-10332 | 24V | 120A | 450AH-1320AH | 30A | 208-240VAC, Single-phase |
| INT-10496 | 36V | 90A | 280AH-990AH | 30A | 208-240VAC, Single-phase |
| INT-10916 | 48V | 75A | 280AH-830AH | 30A | 208-240VAC, Single-phase |
| INT-10935 | 80V | 40A | 170AH-440AH | 30A | 208-240VAC, Single-phase |
| 24-GREEN4-9635 | 96V | 35A | 140AH-380AH | 30A | 208-240VAC, Single-phase |

Available upon request:

- 72 & 80 Volt chargers
- 48V, 95A extra power model
- Specialized charging curves